



### Unique characteristics



Backflow protection unit type 

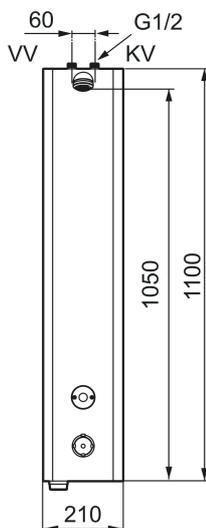

## MORA tronic shower panel WMS, with thermostatic function, battery operation

**Article number:** 720172 **RSK:** 8255841

**Description:** Battery operated, included battery

- Thermostatic function, with adjustable temperature
- Battery operation, can be converted to mains operation
- Connection up G1/2", included ball valve
- With solenoid valve and filter
- Programmable start button. Rinsing time from 10–60 seconds, (30 seconds is the factory preset)
- Flush Timeout - safety shut-off to prevent flooding, maximum of 5 minutes
- Jet angle adjustable +/- 5°
- Flow limiter 9 l/min
- Stainless look
- Can be turned off by solenoid valve (eg for cleaning)
- Low power consumption - Long life
- Equipped with system for thermal disinfection against legionella
- IP class sensor, IP67
- Approved non-return valves, EN-Standard EN1717

### Installation:

- Easy to change battery under the service cover without turning off the water supply
- For mains operation different accessories are required:
  - Alternative 1: AC adapter art.no. S600132 and power supply art.no. S600129, alternatively transformer art.no. S600128, plus extension cable (5 m) art.no. S600127
  - Alternative 2: AC adapter art.no. S600132 and voltage distributor art.no. S600149, plus extension cable (10 m) art.no. S600148

### Tronic WMS:

- Note! Gateway and subscription or dongle are required for the WMS function
- The following options are available with wireless connection to our Tronic WMS system:


- Programmable rinsing time from 10–60 seconds, (30 seconds is the factory preset)
- Selection of activation type:
  - Saving mode, set time, always flush at the same time, factory preset mode
  - Normal, rinsing time is extended if you press again before it stops
  - Switching mode, set time, reactivation interrupts flushing
- Adjustable hygiene flushing, interval and rinsing time (in order to prevent stagnant water)
- Logging of all flushings with point of time, water consumption and temperature for individual mixer or group of mixers (minimum, maximum and average values)
- Battery monitoring
- Built-in temperature measurements of mixed water temperature
- Programmable temperature stop, the mixer will turn off directly at set maximum temperature
- Initiate hot water rinsing

**PRODUCT DESCRIPTION**

**MORA tronic shower panel  
WMS, with thermostatic  
function, battery operation**

Article number: 720172

RSK: 8255841

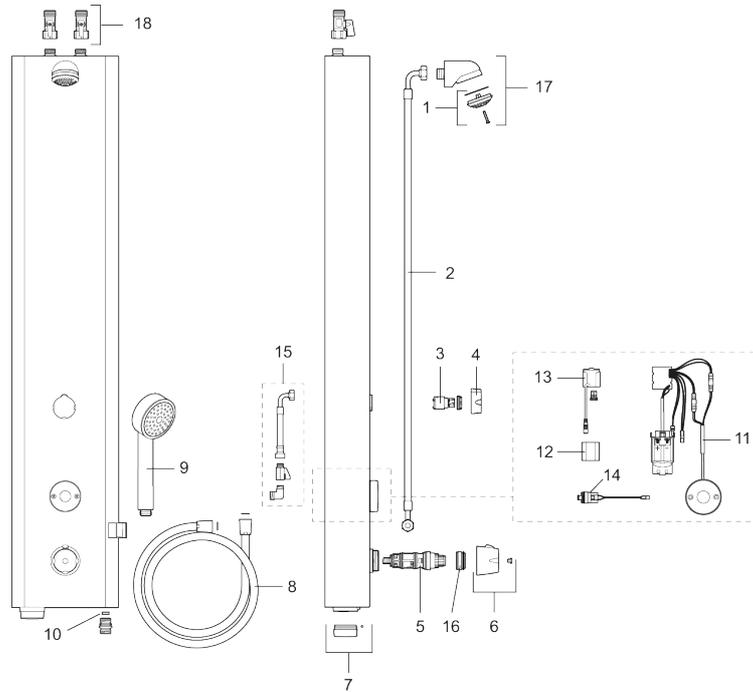

**Sparepartlist**

NO.	ART NO.	RSK	DESCRIPTION
1	729303.AE	8126215	Shower strainer
2	39090700	8221813	Connection hose, 0,7 m
3	S600321	8239708	Cartridge for diverter
4	16221700	8221796	Handle for diverter
5	409419.AE	8938271	Thermostatic cartridge, complete, with service tool
6	S600222	8239545	Temperature handle, complete
7	729459.AE		Cover plug for battery, black
8	S600310	8239707	Shower hose in metal, 1750 mm
9	130361	8199196	Hand shower
10	29900600	8224321	Flow limiter, constant flow 6 l/min at 200–600 kPa
10	29900900	8221809	Flow limiter, constant flow 9 l/min at 200–600 kPa
10	29901200	8224320	Flow limiter, constant flow 12 l/min at 200–600 kPa
11	729465.AE		Electronic unit
12	S600135	8483191	Battery

NO.	ART NO.	RSK	DESCRIPTION
13	S600132	8438826	AC adapter
14	729510.AE		Solenoid valve
15	39090000	8221812	Hose kit, connection behind
16	409364.AE	8346506	Scalding protection ring, (max 42 °C)
17	S600025	8221869	Shower head, complete
18	22801509	5493432	Ball valve G1/2